



Shanghai Bao Zhang
Dorstener Products GmbH

Technical Data Sheet Redrawn Steel Wire

- **Surface:** **Electrolytical galvanized, copper coated or bright**
- **Carbon Content:** C < 0,08% in order to meet the technical characteristics of the wire
- **Material:** 1.0304 C 9 D DIN EN 10016 - 2

Wire diameter mm	Tolerance +/- mm	Tensile strength N/mm ²	Tolerance N/mm ²	Zinc coating g/m ²	Copper coating g/m ²
0,16 – 1,60	0,02	800	100	min. 5	min. 1

The requirements for tensile are per lot of material



Roundness tolerance: 50% of diameter tolerance

Standard Spools:

DIN 160	BB 20
DIN 200	MP 100
DIN 250	MP 500
DIN 355	

Packaging: Spools are packed on paletts or in boxes and are well protected against damage and corrosion

Labeling: Customer's adress, order no., wire diameter, nettweight, gross weight and no. of paletts



SBD GmbH
Marler Str. 109
D-46282 Dorsten

Phone +49 (0) 23 62/95 19 0
Fax +49 (0) 23 62/95 19 11

E-Mail info@sbdwire.com
Web www.sbdwire.com

PACKAGING




Shanghai Bao Zhang
Dorstener Products GmbH


1. Spool Types:

Spool type	Spool Sizes (mm)					Material	Netweight / Spool (kg)	Spools / Palet	Netweight / Palet (kg)
	D1	D2	D4	L1	L2				
DIN 160	160	100	22	160	128	ABS	6	108	650
DIN 200	200	125	23	200	160	ABS	15	75	1.125
DIN 250	250	160	30	190	160	ABS	20	48	960
DIN 355	355	225	35	200	160	ABS	50	12/18	600/900
BB 20	200	105	33	180	160	ABS	18	50	900
MP 100	355	215	127	345	245	ABS	90	6 / 9	540 / 810
BICO 100	355	215	127	345	245	ABS	90	6 / 9	540 / 810
MP 500	600	380	80	680	585	wood	500	-	-


Standard Palet sizes: 1.20m x 0.75m or 1.20 x 1.12m.



BICO 100



DIN 100 - MP 100

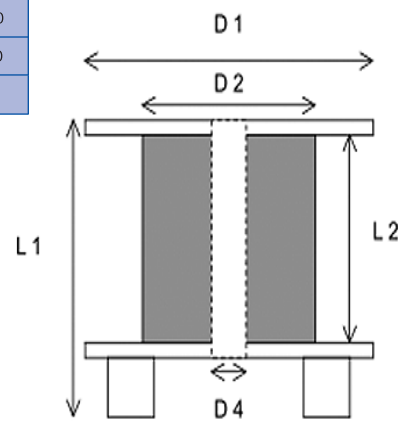

MP 500 / RP 1000

2. Coil Standard Sizes:

Coil Weight kg	Inner Coil Diameter mm	Outer Coil Diameter mm	Height mm
5,50	305	350	40
25	305	350	90
50	330	500	100
135	350	530	435
450	330	680	850
545	330	550	900
635	330	680	850
900	350	870	900
1000	600	900	1000



Coils